



# NELMOR-GRANULATE

## AS SERIES SCREENLESS GRANULATOR



### AS SERIES STANDARD FEATURES

- Screenless operation produces clean, no longs regrind
- Smallest footprint squeezes into the tightest of spaces
- Quick and easy, no tools access - just open the doors
- Vacuum bin with 1" or 2" diameter take-offs available
- Solid dowel and bolted construction
- Locking swivel casters mounted on base
- TEFC 230/3/60 or 460/3/60 gear motor
- 115/1/60 control voltage wired with electrical/mechanical safety interlock

### OPTIONAL FEATURES

- Compressed air evacuation system
- High level indicator



1100 E Woodfield Road  
Schaumburg, IL 60173 USA  
Tel. 847-273-7700 Fax 847-273-7804

www..com



**WHITLOCK/  
MATERIAL  
HANDLING**



**HEAT & COOL**



**BLEND &  
RECLAIM**



**NELMOR/  
GRANULATE**



**DOWNSTREAM  
EXTRUSION**



**AUTOMATE**



**SYSTEMS  
CONTRACTING**




**SERVICE**




# NELMOR-GRANULATE


## AS SERIES SCREENLESS GRANULATOR

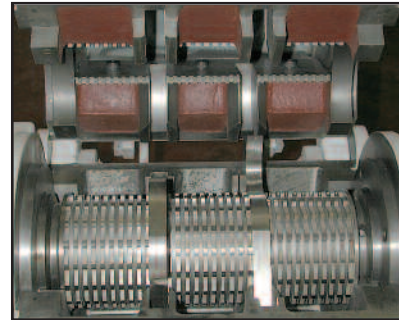

Clamshell opening for easy cleaning

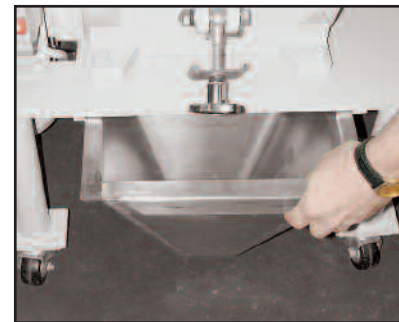

Slide out discharge

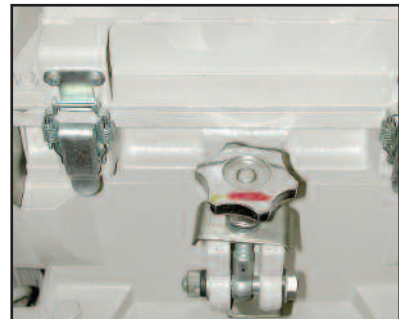

"Tool free" opening for quick access during cleaning

Model	AS1010	AS1213	AS1616
Chamber Size (in.)	10 x 10.5"	11.5 x 13.5"	16" x 16"
Cutter Size, mm (in.)	5mm (.18")		
Feed Height, inches	52"	60"	63"
Throughput, lbs./hr	30 lbs./hr	40 lbs./hr	50 lbs./hr
Working Envelope (LXW)	29"x18"	32.5"x23"	23"x49"
Weight (lbs.)	396 lbs	606 lbs	992 lbs



1100 E Woodfield Road  
Schaumburg, IL 60173 USA  
Tel. 847-273-7700 Fax 847-273-7804

www.aecinternet.com



**WHITLOCK/  
MATERIAL  
HANDLING**



**HEAT & COOL**



**BLEND &  
RECLAIM**



**NELMOR/  
GRANULATE**



**DOWNSTREAM  
EXTRUSION**



**AUTOMATE**



**SYSTEMS  
CONTRACTING**



**SERVICE**